





# SPECIFICATION

## LT 330+

**Description:** Direct thermal non-top coated  
**Application:** Well suited for Credit Card, ATM Receipt

<u>Physical Properties</u>		Unit	Specification	Test method
Substance		g/m <sup>2</sup>	72.0 ± 5.0	ISO 536
Thickness		µm	78 ± 5	ISO 534
Smoothness		Sec	Min 100	Oken method
Brightness		%	Min 75	ISO 2470 (C/2°)
Tensile Strength	MD/CD	kN/m	Min 3.0 / Min 1.0	ISO 1924-2
Tearing Strength	MD/CD	mN	Min 300 / Min 300	ISO 1974
Stiffness	MD/CD	Cm <sup>3</sup>	>40 / >20	JIS P8143
<u>Image Density</u>				
10.32mJ/ mm <sup>2</sup>			Min 0.90	Atlantex 400 / Speed 4 inch/sec.
16.00mJ/ mm <sup>2</sup>			Min 1.10	

<u>Durability</u>	Background / Image part	Test method
Heat Resistance	Max 0.20 / Min 1.00	60°C dry 24Hrs.
Moisture Resistance	Max 0.20 / Min 1.00	40°C 90%RH 24Hrs.
Light Resistance	Max 0.20 / Min 1.00	5000Lux 100Hrs.

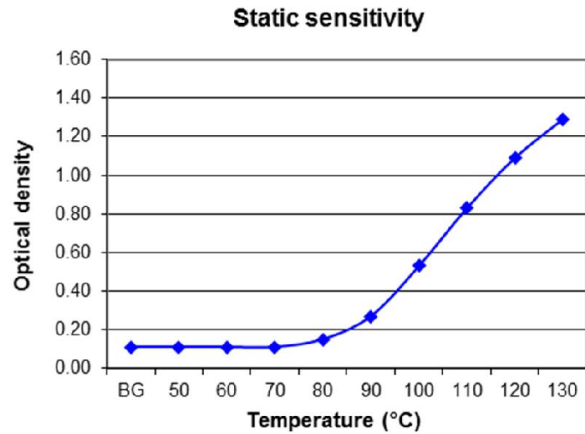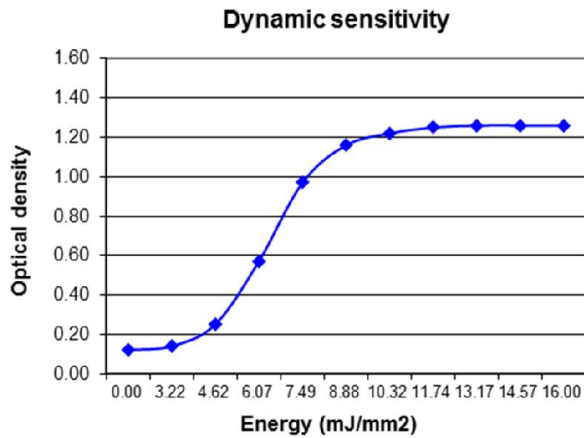

### Storage Suggestion

Our thermal paper should be stored at a constant temperature of 23 ± 5 °C and a relative humidity of 50 ± 10%. Exposure to strong sunlight or strong artificial light or the influence of aggressive chemicals should be avoided.

Valid from June 2023